

MODEM BROADTECH 8186 V2

1. Recomendado realizarlo conectado directo con cable de red. Abrir el navegador y en la barra de direcciones colocar la IP del módem



2. Se abrirá una página donde se colocara el nombre y la contraseña de acceso al módem.

Nombre de usuario: admin

Contraseña: Tu64\$TEL


Luego damos clic en Aceptar

Advertencia: este servidor está solicitando que su nombre de usuario y contraseña se envíen de forma no segura (autenticación básica sin conexión segura).



 Recordar mis credenciales

3. En la página principal del módem al lado izquierdo dar clic en la opción Wireless

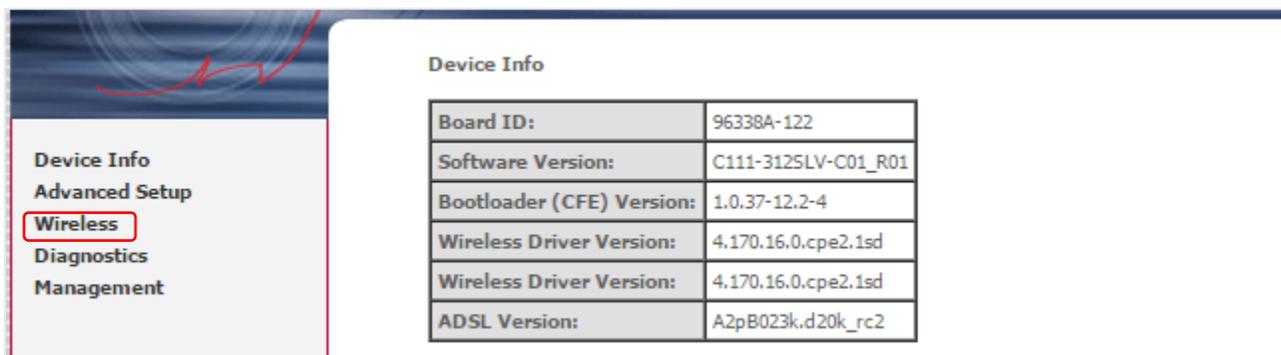

The screenshot shows the modem's web interface. On the left is a sidebar menu with the following items: 'Device Info', 'Advanced Setup', 'Wireless' (highlighted with a red box), 'Diagnostics', and 'Management'. The main content area is titled 'Device Info' and contains a table with the following data:

Board ID:	96338A-122
Software Version:	C111-3125LV-C01_R01
Bootloader (CFE) Version:	1.0.37-12.2-4
Wireless Driver Version:	4.170.16.0.cpe2.1sd
Wireless Driver Version:	4.170.16.0.cpe2.1sd
ADSL Version:	A2pB023k.d20k_rc2

4. Dar clic en opción Basic y en la opción SSID colocar el nombre que desea colocar al WI-Fi, luego damos clic en Save/Apply para guarda el cambio del nombre

Wireless -- Basic

This page allows you to configure basic features of the wireless LAN interface. You can enable or disable the wireless LAN interface (also known as SSID) and restrict the channel set based on country requirements. Click "Apply" to configure the basic wireless options.

Enable Wireless

Hide Access Point

Clients Isolation

Disable WMM Advertise

SSID:

BSSID:

Country:

Max Clients:

5. Para cambiar la contraseña en las opciones que se despliegan de Wireless, damos clic en Security

Wireless -- Security

This page allows you to configure security features of the wireless LAN interface. You may setup configuration manually OR through WiFi Protected Setup(WPS)

WSC Setup

Enable WSC

Manual Setup AP

You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and specify the encryption strength. Click "Save/Apply" when done.

6. En Network Authentication seleccionamos la opción WPA2-PSK y en WPA Pre-Shared Key colocamos la nueva contraseña como mínimo 8 caracteres, al finalizar damos clic en Save/Apply para guardar los cambios

Manual Setup AP

You can set the network authentication method, selecting data encryption, specify whether a network key is required to authenticate to this wireless network and specify the encryption strength. Click "Save/Apply" when done.

Select SSID:

myred ▼

Network Authentication:

WPA-PSK ▼

WPA Pre-Shared Key:

[Click here to display](#)

WPA Group Rekey Interval:

0

WPA Encryption:

TKIP ▼

WEP Encryption:

Disabled ▼

Save/Apply