


## Huawei HG630 V2

Paso 1: En la barra de direcciones de su navegador ingresar con puerta de enlace: 192.168.1.1

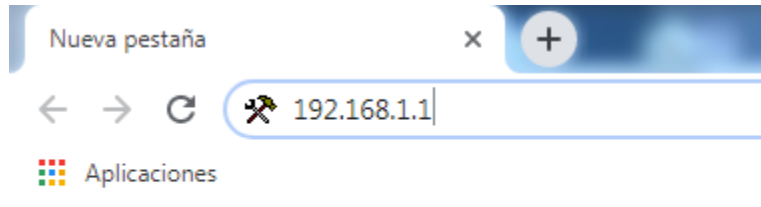

Paso 2: En la ventana de login ingresar Usuario y Contraseña.

usuario: admin

contraseña: cl@r0

Letra “c” minúscula.


Número “1” Uno

Símbolo “@” Arroba


Letra “r” minúscula

Numero “0” Cero

Luego presionar Log in

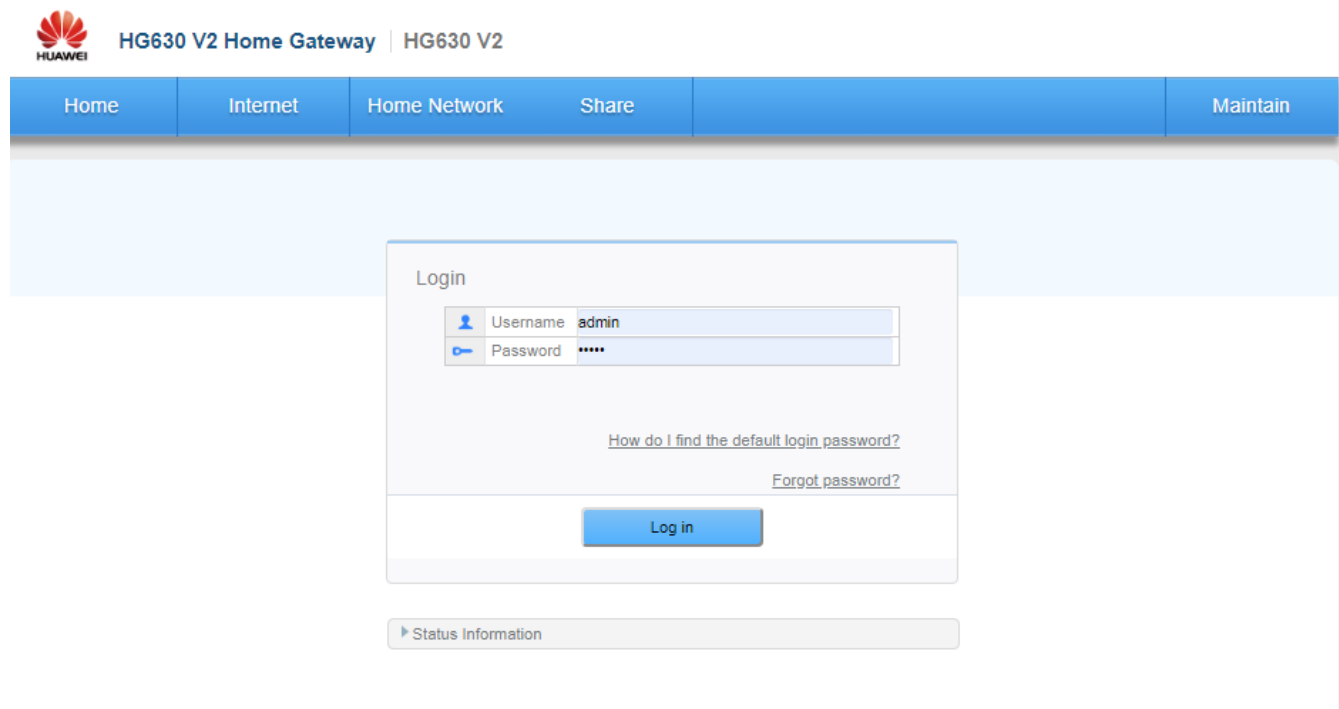


Paso 3: Al haber ingresado al Modem aparece la ventana de inicio como se muestra en la imagen siguiente.

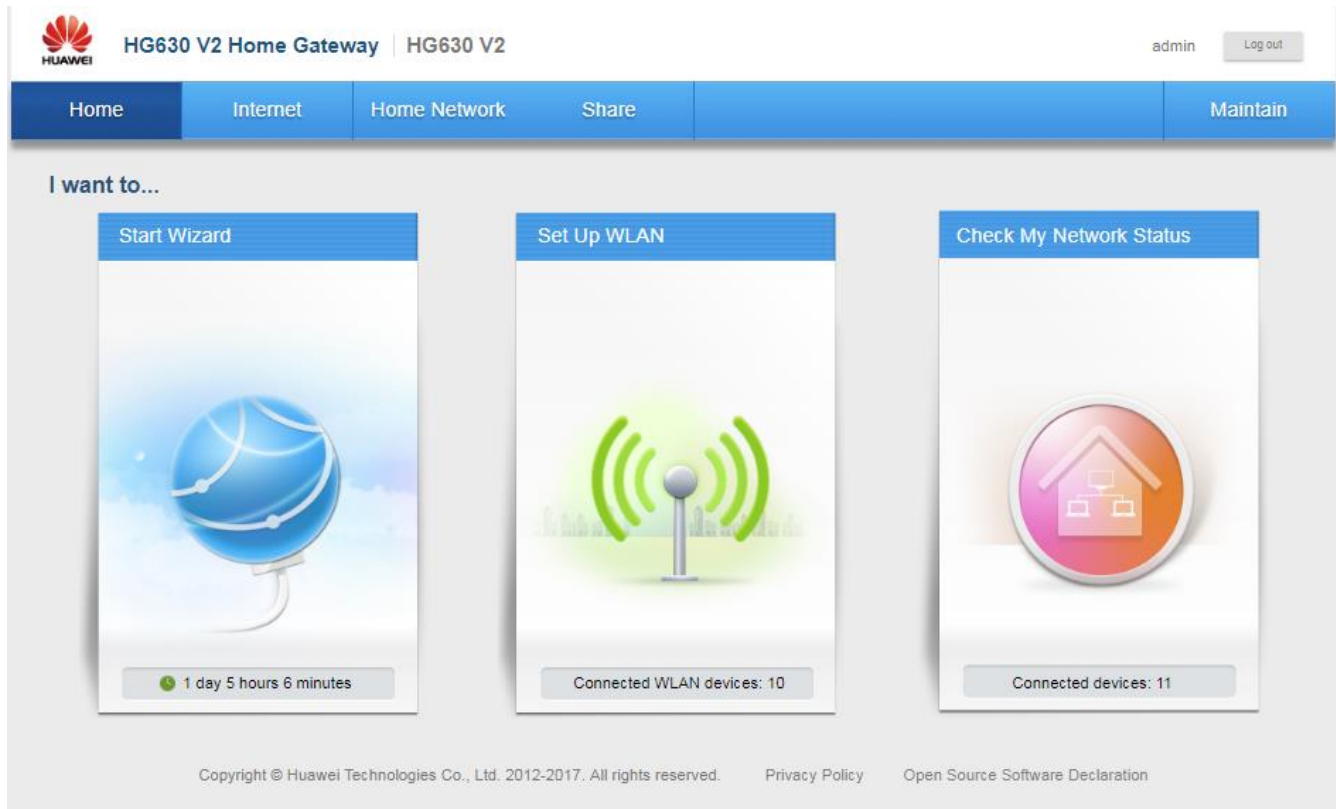

Paso 4, personalización de Wifi en modo fácil: Selecciones la opción que dice Set Up WLAN en donde se cambiara el SSID (Nombre de la Red) y el Password (Contraseña).

Luego presionar Save para Guardar.

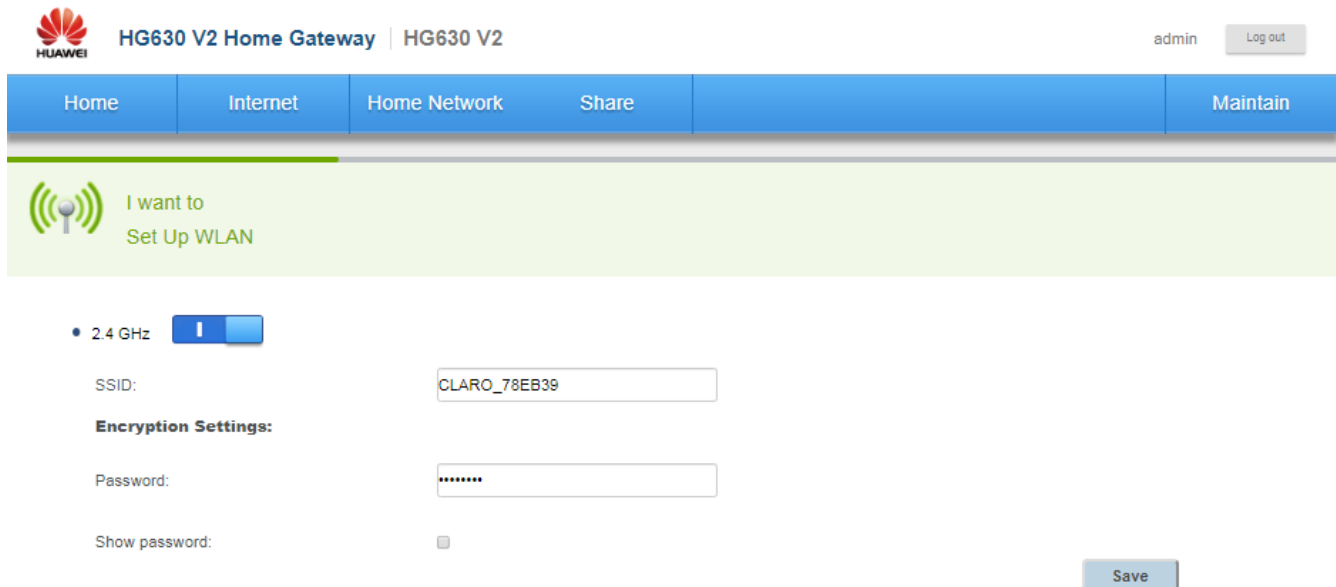

## Personalizar Wifi modo avanzado

Para cambiar **canal de frecuencia** entrar en la siguiente **Ruta – Home Network – WLAN Settings – Advance Settings**

The screenshot shows the router's configuration interface. At the top, there are navigation tabs: Home, Internet, Home Network (selected), Share, and Maintain. On the left, a sidebar lists: LAN Devices, LAN Interface, WLAN Settings (selected), and WLAN Access. The main content area is titled 'WLAN Settings' and includes a sub-header 'WLAN Settings' and a description: 'Your smart phone or wireless-capable computer can access the Internet through WLAN.' Below this, there are three sections: 'Basic Settings' (with a 'What's this?' link), 'WLAN Encryption', and 'Advanced Settings' (with a 'What's this?' link). The 'Advanced Settings' section contains several dropdown menus and checkboxes: 'Transmit power (percentage):' set to 100%; '2.4 GHz Frequency Band' section with 'Transmission mode:' set to 802.11b/g/n, 'Channel:' set to Auto, 'Enable WMM (QoS):' checked, '11n MCS:' set to Auto, '11n bandwidth:' set to 20/40 MHz, and '11n guard interval:' set to Long. A 'Save' button is located at the bottom right of the Advanced Settings section. At the very bottom, there is a link for 'Other SSID Settings'.

Setting	Value
Enable WLAN 2.4 GHz:	<input checked="" type="checkbox"/>
Transmit power (percentage):	100%
<b>2.4 GHz Frequency Band</b>	
Transmission mode:	802.11b/g/n
Channel:	Auto
Enable WMM (QoS):	<input checked="" type="checkbox"/>
11n MCS:	Auto
11n bandwidth:	20/40 MHz
11n guard interval:	Long

Para cambiar **El tipo de encriptación** entrar en la siguiente **Ruta – Home Network – WLAN Settings – WLAN Encryption**

The screenshot shows a web interface for configuring WLAN settings. At the top, there is a navigation bar with tabs: Home, Internet, Home Network (selected), Share, and Maintain. On the left side, there is a sidebar menu with options: LAN Devices, LAN Interface, WLAN Settings (selected), and WLAN Access. The main content area is titled "WLAN Settings" and includes a sub-section "WLAN Encryption".

**WLAN Settings**  
Your smart phone or wireless-capable computer can access the Internet through WLAN.

**Basic Settings** [What's this?](#)

Enable WLAN 2.4 GHz:  Save

**WLAN Encryption** [What's this?](#)

**2.4 GHz Frequency Band**

SSID:

Enable SSID:

**Encryption Settings**

Security mode:  ▼

WPA encryption mode:  ▼

WPA pre-shared key:

Show password:

Enable AP isolation:

Hide broadcast:  Save

Se puede ver los dispositivos conectados a la red en la siguiente Ruta – Home Network – LAN Device – LAN Device Settings

Home Internet **Home Network** Share Maintain

LAN Devices  
LAN Interface  
WLAN Settings  
WLAN Access

**LAN Devices**  
You can view the connection status and network addresses of all LAN devices such as computers and STBs in your household.

LAN Device Settings [What's this?](#)

IP address type: All  
Status: All

SA-TRT-047-D015-Ethernet	<a href="#">Edit forwarding rules</a> <a href="#">Edit DMZ</a>	<input checked="" type="checkbox"/> Edit	<input type="checkbox"/> Delete
android-3f54b5af7da442b-Wireless	<a href="#">Edit forwarding rules</a> <a href="#">Edit DMZ</a>	<input checked="" type="checkbox"/> Edit	<input type="checkbox"/> Delete
android-90e28eb8941804a2-Wireless	<a href="#">Edit forwarding rules</a> <a href="#">Edit DMZ</a>	<input checked="" type="checkbox"/> Edit	<input type="checkbox"/> Delete
android-7eb5048fdee8b24-Wireless	<a href="#">Edit forwarding rules</a> <a href="#">Edit DMZ</a>	<input checked="" type="checkbox"/> Edit	<input type="checkbox"/> Delete
Mendoza-Wireless	<a href="#">Edit forwarding rules</a> <a href="#">Edit DMZ</a>	<input checked="" type="checkbox"/> Edit	<input type="checkbox"/> Delete
Static-6C-00-6B-F1-BD-5F-Wireless	<a href="#">Edit forwarding rules</a> <a href="#">Edit DMZ</a>	<input checked="" type="checkbox"/> Edit	<input type="checkbox"/> Delete
	<a href="#">Edit forwarding rules</a>		

Login

Username: admin  
Password: .....

[How do I find the default login password?](#)  
[Forgot password?](#)

Log in

**Status Information**

Connection duration:	1 day 5 hours 35 minutes 12 seconds
Connected WLAN devices:	10
WLAN 2.4 GHz frequency band:	ON
SSID:	CLARO_78EB39
Connected Ethernet devices:	1
USB storage devices:	0
Hardware version:	VER.B
Software version:	V100R001C121B013

O también en la pantalla de Inicio Dando Clic **Status information**